

#### USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader\*).



#### SERVICE TEMPERATURES

Controlled temperature from 5° to 18°C (41° to 65°F).



#### DOSAGES

Up to three different dosage through high quality mechanical buttons.



#### SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI\* with TCP/IP protocol.



#### BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



#### WINE CARD

Chip card system.



#### REFRIGERATION SYSTEM

Use of modern no-frost professional cooling system.



#### GAS

Nitrogen or food grade Argon (cylinder or generator not included).



#### CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened\*



#### LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations\*.



#### SAFETY


The dispenser comes with a key lock.



#### FLEX TECHNOLOGY

Thanks to the flex technology, it is possible to have multiple combination for the dispensers.

## SPACE REQUIREMENTS

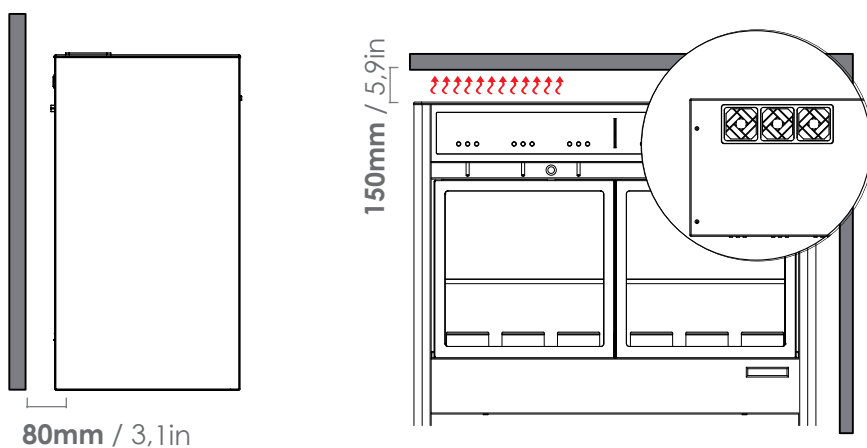

## US PLUG SPECS


\*Optional

#### NEMA RECEPTACLE 5-15r



## TECHNICAL SPECIFICATIONS

WIDTH	<b>677mm</b>   26,65in
HEIGHT	<b>632mm</b>   24.9in
DEPTH	<b>351mm</b>   13.83in
WEIGHT CT	<b>54kg</b>   119lbs

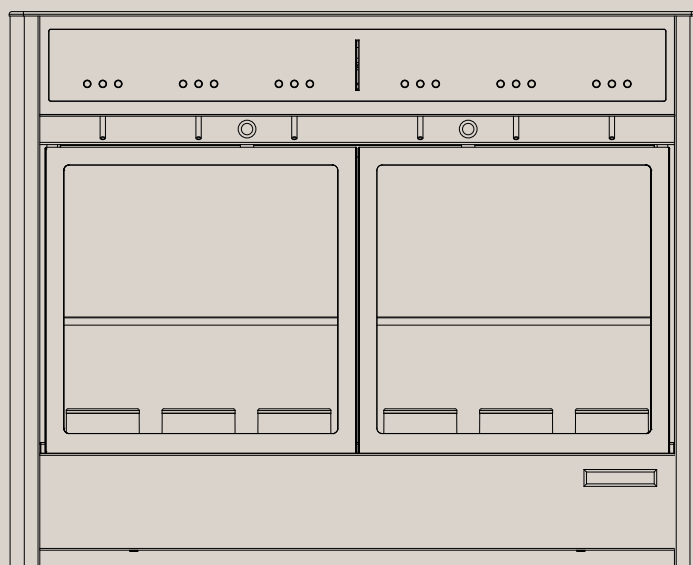

## MODELS

DISPENSER	ORDER CODE	REFRIGERATION	ELECTRICAL REQUIREMENTS
<b>SEI - US &amp; CANADA</b>	<b>S306623424201</b>	ONE TEMPERATURE	110VAC 60Hz - 2,0A
<b>TRE + 3 - US &amp; CANADA</b>	<b>S306923424241</b>	DUAL TEMPERATURE	110VAC 60Hz - 2,2A
<b>DUE + 4 - US &amp; CANADA</b>	<b>S306A23424281</b>	DUAL TEMPERATURE	110VAC 60Hz - 2,2A
<b>SEI - EU/WORLD</b>	<b>S306633434301</b>	ONE TEMPERATURE	220VAC 50Hz - 1,0A
<b>TRE + 3 - EU/WORLD</b>	<b>S306933434341</b>	DUAL TEMPERATURE	220VAC 50Hz - 1,1A
<b>DUE + 4 - EU/WORLD</b>	<b>S306A33434381</b>	DUAL TEMPERATURE	220VAC 50Hz - 1,1A

## CERTIFICATIONS

**USA & CANADA 110VAC 60Hz**

**NSF 25**  
**UL 751**  
**UL 541**  
**CSA C22.2 #128**



**EUROPE & WORLD 220VAC 50Hz**

**NSF 25**  
**IEC 60335-1**  
**IEC 60335-2-75**  
**IEC 60335-2-24**

