

#### USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader\*).



#### SERVICE TEMPERATURES

Controlled temperature from 5° to 18°C (41° to 65°F).



#### DOSAGES

Up to three different dosage through high quality mechanical buttons.



#### SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI\* with TCP/IP protocol.



#### BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



#### WINE CARD

Chip card system.



#### REFRIGERATION SYSTEM

Use of modern no-frost professional cooling system.




#### GAS

Nitrogen or food grade Argon (cylinder or generator not included).



#### CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened\*



#### LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations\*.



#### SAFETY


The dispenser comes with a key lock.



#### FLEX TECHNOLOGY

Thanks to the flex technology, it is possible to have multiple combination for the dispensers.

## SPACE REQUIREMENTS

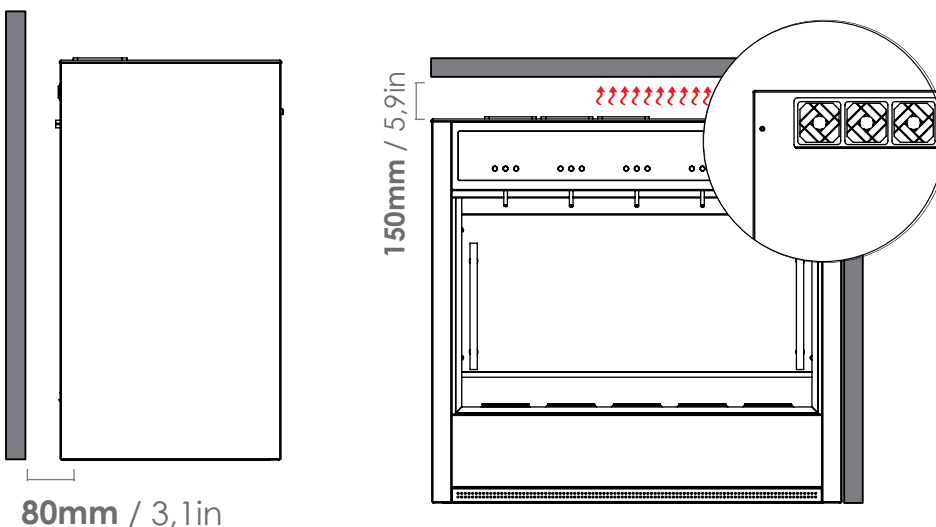

## US PLUG SPECS


\*Optional

#### NEMA RECEPTACLE 5-15r



## TECHNICAL SPECIFICATIONS

WIDTH	677mm   26,65in
HEIGHT	632mm   24.9in
DEPTH	351mm   13.83in
WEIGHT CT	54kg   119lbs

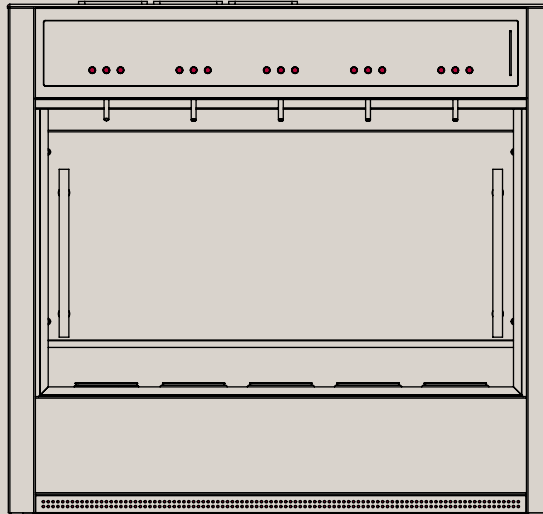

## MODELS

DISPENSER	ORDER CODE	REFRIGERATION	ELECTRICAL REQUIREMENTS
<b>CINQUE R T - US &amp; CANADA</b>	<b>S305300624401</b>	NONE	100-240VAC 50/60HZ
<b>CINQUE - 110V</b>	<b>S305321624201</b>	ONE TEMPERATURE	110VAC 60Hz - 2,0A
<b>DUE + 3 - 110V</b>	<b>S305321624221</b>	DUAL TEMPERATURE	110VAC 60Hz - 2,2A
<b>CINQUE R T - EU/WORLD</b>	<b>S305300634501</b>	NONE	100-240VAC 50/60HZ
<b>CINQUE - 220V</b>	<b>S305331634301</b>	ONE TEMPERATURE	220VAC 50Hz - 1,0A
<b>DUE + 3 - 220V</b>	<b>S305331634321</b>	DUAL TEMPERATURE	220VAC 50Hz - 1,1A

## CERTIFICATIONS

### USA & CANADA 110VAC 60Hz

NSF 25  
UL 751  
UL 541  
CSA C22.2 #128



### EUROPE & WORLD 220VAC 50Hz

NSF 25  
IEC 60335-1  
IEC 60335-2-75  
IEC 60335-2-24

